#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

# (19) World Intellectual Property Organization

International Bureau



## ! (BEEN \$1800) (1 BEEN 1801) COUN BEEN DUN 18 19 COUN BEEN BURN TO BE FOR HE DE HIN TERREN THE BEEN BEEN FOR B

#### (43) International Publication Date 19 May 2005 (19.05.2005)

#### **PCT**

# (10) International Publication Number WO 2005/044713 A2

(51) International Patent Classification7:

**B66F** 

(21) International Application Number:

PCT/US2004/036728

(22) International Filing Date:

4 November 2004 (04.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

60/517,323

4 November 2003 (04.11.2003) US

(71) Applicant and

(72) Inventor: BURTON, Stewart, S. [US/US]; 47 Rockwood Court, Milford, CT 06460 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HELLMAN, Robert, R., Jr. [US/US]; 33 Hawley Road, Oxford, CT 06478 (US).


(74) Agent: CROZIER, John, H.; 1934 Huntington Turnpike, Trumbull, CT 06611-5116 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,

[Continued on next page]

(54) Title: LIFTING DEVICE AND METHOD

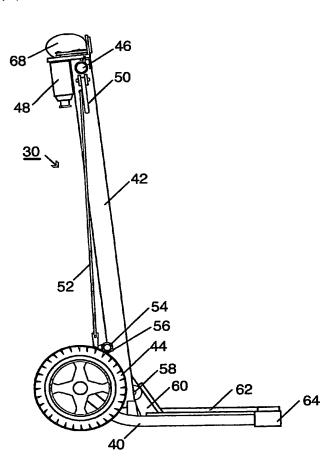

(57) Abstract: In a preferred embodiment, an apparatus, comprising: a column (42) normally generally vertical when a device (30) of which the column (42) is a part is in an operating position; and a platform (62) operatively connected at one end to the column (42) and normally generally horizontal when the device (30) is in an operating position, the platform (62) being selectively raised or lowered to raise or lower a load placed on the platform (62).

### WO 2005/044713 A2



SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,GW, ML, MR, NE, SN, TD, TG).

#### Published:

without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.